



FIRST IMPRESSIONS

I N T E R N A T I O N A L

FI Lawrence Commercial Hardware

FIDH501

SPECIFICATIONS AND TECHNICAL DETAILS :

Basic wall mount

Dimensions : 80mmLx80mmWx40mmH

Dual Voltage : 12V / 24VDC

Current Draw : 100mA/12VDC, 50mA/24VDC

Holding Force : about 50KGS


Adjustable or Fixed Armature Plate

Built-in Spike Suppressor

Sensor : Optional

CE Approved

UL Listed

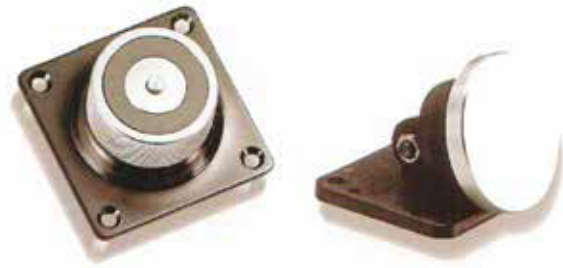

FIDH505

SPECIFICATIONS AND TECHNICAL DETAILS :

Wall Flush Mount

Dimensions : 121mmLx78mmWx25mmH

Dual Voltage : 12V / 24VDC

Current Draw : 100mA/12VDC, 50mA/24VDC

Holding Force : about 50KGS

Adjustable or Fixed Armature Plate

Built-in Spike Suppressor

Sensor : Optional

CE Approved

UL Listed

